

||||||| **Easy.Visc** – Dynamic viscosity measurement
Reliable results with easy handling for quality control and incoming goods inspection



||||||| **Small and smart**

- || **Efficient** with small sample volume
- || **GLP conform** with integrated user management
- || **Fast** with thermoelectric temperature control

Easy.Visc – compactness and ease-of-use in a new dimension


For lubricants, oils, polymers and other liquids

Routine measurements have to be fast, well documented and should provide a direct “passed/failed” information. The Easy.Visc helps you with all of these topics. A small sample volume of 2.5 ml reduces sample consumption, cleaning efforts and waiting time for temperature equilibrium. The user-definable methods allow easy setting of parameters and the direct display of both the dynamic and kinematic viscosity gives you the right results without time consuming calculations.




Robust measuring system

- || Measurement of solutions, emulsions and suspensions
- || Simply inject the sample by syringe and start the test
- || Robust chamber based on stainless steel and PTFE design allows easy cleaning
- || Factory-adjusted: ready for immediate use

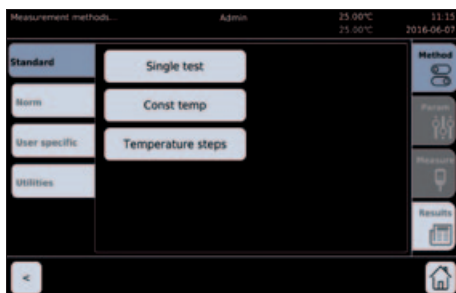

Graphic user interface for easy operation

- || Touch screen with GLP user level for a full traceability
- || A single measurement for dynamic and kinematic viscosity
- || Easy temperature control
- || Graphical display of results
- || Data storage of up to 125,000 measuring results

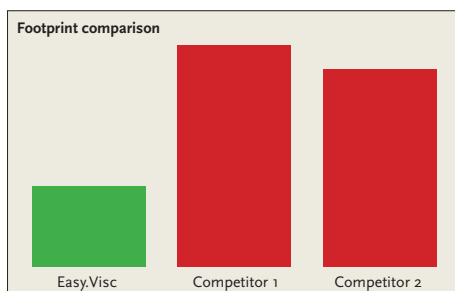

Unique design – smallest footprint

- || Only 190 x 165 mm footprint
- || Only 2.5 ml of sample required
- || From 0 to 100 °C: no thermostat bath required
- || Peltier elements allow unparalleled heating rates of up to 30 °C per minute
- || Easy sample handling with exchangeable sample inlet

Technical data

Temperature range	0...100 °C	Minimum sample volume	2.5 ml
Viscosity range	0.7...700 mm ² /s	Dimensions W x D x H	190 x 165 x 185 mm
Temperature stability	+/- 0.01 K	Operating conditions	15...35 °C
Voltage	100...240 V	Weight	5.4 kg
PC connection	USB		